





Head Office 1st Floor, Vyapar Bhavan, Kadia Kui, Relief Road, Ahmedabad - 380001. Ph:- 079 - 22160386, 65254835, 22134835 Mobile : 7819819941, 9375706649

Ahmedabad Branch GF-B-14, Jayraj Complex, Nr. Soni ni Chawl, Odhav, Ahmedabad - 382415.

Ph:- 079 - 22890202, 65458950, 65404657, 65400202 Mobile : 7878825197, 7819819938, 9375706648

Website : www.bearingtoolcentre.com, www.bearingtoolscentre.com | Email : info@bearingtoolcentre.com

Our Sister Concern : RELIEF SERVICE CENTRE

Repairs, Removal of Jaw Error, Bore Gauge Extension, Instrument Modifications & Spares

Quotation

Range -50 to 1300 C -50 to 150 C Make CIE CIE Code 305 310 1000 Rs. 2300 Page No - 2 Page No - 3 Catalog **Calibration NABL** 825 850 **Calibration NON NABL** 525 375


99 Contact Thermometer

Note : No any warranty in all above Testing Instruments

Terms & Conditions –

- Goods offered Subject to Prior Sale
- Price Validity: "15 Days from Date of Quotation"
- C.S.T 2% extra against form C. Otherwise 5% without form C For Out of Gujarat Sales only.
- VAT 5% extra for Sales within Gujarat. Prices Ex-Godown Ahmedabad.
- Payment against Proforma Invoice, Packing, Forwarding & Freight extra.
- Bank Detail Kotak Mahindra Bank Ltd.
- Branch Shivranjini
- Bank IFSC Code KKBK 0000 810
- Bank Account No. 08102 00000 2689
- Note While making payment online do mention your Company's name.
- TIN NO 24070901229 , CST No. 24570901229
- We are looking forward to your valued orders.

CIE MAKE

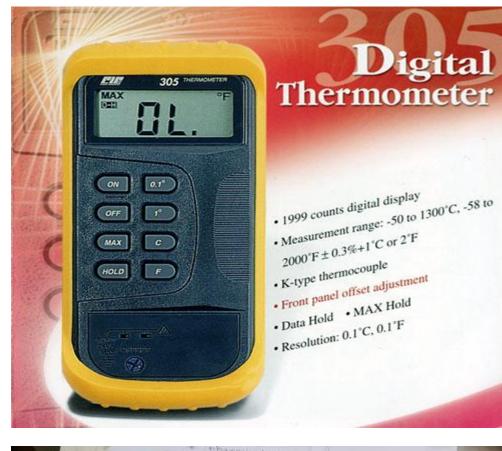



PDF created with pdfFactory Pro trial version <u>www.pdffactory.com</u>



Specifications:

ELECTRICAL: Measuring Range: -50°C to 150°C (-58°F to 302F)

Resolution: 0.1°C (1°F)

Accuracy: ± 1°C (at 0°C to 100°C) ± 3°C (at -50°C to 0°C and 100°C to 150°C) ± 2°F (at 32°F to 212°F) ± 6°F (at -58°F to 32°F and 212°F to 302°F)

ENVIRONMENTAL: Ambient Operating Range: 0 to 50C, 32 to 122F Storage Temperature: -40C to 60C, -40 to 140F (Battery removed) Humidity: 0% to 90% (0 to 35C), 0 to 70% (35 to 50C)

GENERAL INFORMATION:

Weight: 130 Grams. Dimensions: 5.6' x 1.8" 1.1" (L x W x H) Battery: Standard 9V Battery (NEDA 1604, 6F22, 006P) Battery Life: 300 Hours.

Display: 3 1/2 digit LCD with maximum reading of 1999.