

# **BEARING & TOOL CENTRE**



### **Head Office**

1st Floor, Vyapar Bhavan, Kadia Kui,
 Relief Road, Ahmedabad - 380001.
 Ph:- 079 - 22160386, 65254835, 22134835
 Mobile: 7819819941, 9375706649

### Ahmedabad Branch

GF-B-14, Jayraj Complex, Nr. Soni ni Chawl, Odhav, Ahmedabad - 382415.

Ph:- 079 - 22890202, 65458950, 65404657, 65400202 Mobile : 7878825197, 7819819938, 9375706648

Website: www.bearingtoolcentre.com, www.bearingtoolscentre.com | Email: info@bearingtoolcentre.com

### Our Sister Concern: RELIEF SERVICE CENTRE

Repairs, Removal of Jaw Error, Bore Gauge Extension, Instrument Modifications & Spares

### Quotation

152 Grease Pump – Groz make

Code	D %	VGP/6A	VGP/6	VGP/10A	VGP/10	
Rs.	22	5196	5568	5840	6294	
Catalog		Page No 2	Page No. – 2	Page No. – 2	Page No 2	
Code	D %	VGP/15	V12	V16	V12W	V16W
Rs.	22	6846	2496	2843	2896	3191
Catalog		Page No. – 2	Page No. – 5	Page No. – 5	Page No. – 5	Page No 5

# **Terms & Conditions –**

- · Goods offered Subject to Prior Sale
- Price Validity: "15 Days from Date of Quotation"
- C.S.T 2% extra against form C. Otherwise 5% without form C For Out of Gujarat Sales only.
- VAT 5% extra for Sales within Gujarat. Prices Ex-Godown Ahmedabad.
- Payment against Proforma Invoice, Packing, Forwarding & Freight extra.
- Bank Detail Kotak Mahindra Bank Ltd.
- Branch Shivranjini
- Bank IFSC Code KKBK 0000 810
- Bank Account No. 08102 00000 2689
- Note While making payment online do mention your Company's name.
- TIN NO 24070901229, CST No. 24570901229
- We are looking forward to your valued orders.

# **GROZ MAKE**



# >

## PORTABLE GREASING SYSTEM

- World's Most Advanced High Pressure Grease Pump
- For use in Workshops, site applications, tractors, escavators, chain tightening etc.
- Converts from High Pressure to High Volume
- One Hand Operation
- Includes rubber lined follower plate







**High Volume Setting** 

Common sight on construction equipment requiring high volume routine greasing

Art. N	le.	Capacity	Bax Qty.	List Price (₹)
G5-5	5	5 kg	1	7,040.00

# **BUCKET GREASE PUMPS**




- High Volume High Pressure Bucket Grease Pump
- For use with agricultural, earth moving equipment & in automotive applicationsespecially useful in applications requiring frequent greasing
- For use with NLGI
   1,2 & 3 greases
- Includes rubber lined follower plate

### Variable Handle Setting





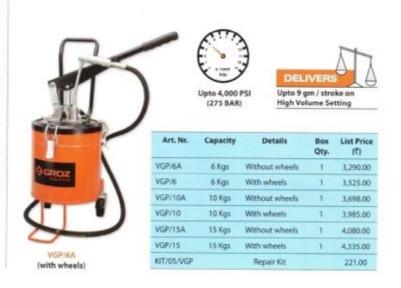

# FOOT OPERATED GREASE PUMP





- High Pressure Portable Grease Pump for quick effortless greasing in everyday lubrication such as greasing of excavators & other earth moving equipment, agricultural equipment, automotive etc.
- Hands free operation; pump operates using the Foot Lever, which greatly reduces effort & allows high pressure greasing with highest comfort
- · Can be operated by hand when under low machinery
- Economical, pump is operated by a single person & uses low cost bulk grease
- Designed with all moving parts submerged in the same grease which needs to be pumped, thereby staying lubricated at all times
- Moving parts create wave action in grease, auto removing air pockets & eliminating the use of a Follower plate
- Pump delivers over 2 gms of grease per stroke & develops 8700 PSI (600 BAR)
- Works with NLGI 1, 2 & 3 Greases

Art. Nr.

FOP/10A

Capacity

10 kg





# why us?

our tools are used worldwide for a large variety of applications

List Price (?)

6,020.00

Upto 2 gms / stroke





### PORTABLE GREASING SYSTEM

- Designed to cater to daily bulk greasing needs at workshops requiring movable systems
- Includes:
  - Maxilube\* Air Operated 50:1 pump suitable for 180 kg drums
  - Pump complete with drum cover, follower plate, 84" high pressure grease hose
  - 3. Booster Grease Control Valve
  - 4. Retracta Grease Hose Reel
  - 5. Drum Trolley for 180 kg drums









## Bucket Oil Pumps

V12 V16

Pump designed for transferring engine oil, transmission oil, differential & heavier oils in shop floors & workshops

Zinc plated pump body with aluminum die cast head & adjusting flange

Powder coated steel drum & drum cover

Wear resistant brass piston rings fitted onto zinc die cast piston

3 Pivot points for handling media of diferent viscosities

Complete with 4' (1.25 m) fuel resistant soft PVC hose with nozzle for efficient discharge

Pump supplied complete with steel bucket

#### Available in two options

- a. Without wheels
- b. With wheels for convenient mobility

### WETTED COMPONENTS

Steel, Aluminum, Zinc, Brass, NBR, PVC

#### RECOMMENDED USE

Engine oil, Transmission oil, differential & heavier oils

### DO NOT USE

Water based & other corrosive media

### **FEATURES**

DELIVERS

UPTO
125 ML (4.64 OZ) / STROKE



### ORDERING INFORMATION

CAT NR.	MRP (₹)	CAT NR.	MRP (₹)	BUCKET CAPACITY (litres)	BOX QTY
WITHOUT WHEELS		WITH WHEELS			
V12	2424.00	V12W	2812.00	12	1
V16	2760.00	V16W	3098.00	16	1



FOR MORE INFORMATION CONTACT US AT: +91.124.282.7777 |

india@groz-tools.com

www.groz-tools.com