



BEARING & TOOL CENTRE



Head Office

1st Floor, Vyapar Bhavan, Kadia Kui,
Relief Road, Ahmedabad - 380001.
Ph:- 079 - 22160386, 65254835, 22134835
Mobile : 7819819941, 9375706649

Ahmedabad Branch

GF-B-14, Jayraj Complex, Nr. Soni ni Chawl,
Odhav, Ahmedabad - 382415.
Ph:- 079 - 22890202, 65458950, 65404657, 65400202
Mobile : 7878825197, 7819819938, 9375706648

Website : www.bearingtoolcentre.com, www.bearingtoolscentre.com | Email : info@bearingtoolcentre.com

Our Sister Concern : RELIEF SERVICE CENTRE

Repairs, Removal of Jaw Error, Bore Gauge Extension, Instrument Modifications & Spares

Quotation

15	Indicating Micrometer	Least count 0.002 mm
----	-----------------------	----------------------

Range-mm	W	C	D%	0-25	0-25	25-50	50-75	75-100
InsizeRs.	12	N		19722	19722	22571	25858	29467
Code				3332-25	3332-25B	3332-50	3332-75	3332-100
Catalog				Page No. - 2	Page No. - 2	Page No. - 2	Page No. - 2	Page No. - 2

15 -1	Indicating Micrometer	Least count 0.01 mm
-------	-----------------------	---------------------

Range-mm	W	C	D%	0-25	25-50	50-75	75-100
InsizeRs.	12	N		12024	12813	13601	14389
Code				3331-25A	3331-50A	3331-75A	3331-100A
Catalog				Page No. - 2	Page No. - 2	Page No. - 2	Page No. - 2
Range-mm	W	C	D%	100-125	125-150	150-175	
InsizeRs.	12	N		15178	15967	16755	
Code				3331-125A	3331-150A	3331-175A	
Catalog				Page No. - 2	Page No. - 2	Page No. - 2	

15 - 2	Indicating Micrometer	Least count 0.001 mm
--------	-----------------------	----------------------

Range-mm	W	C	D %	0-25	25-50	50-75	75-100
MitutoyoRs.	12	N		26009	27360	28999	30197
Code			5	510-121	510-122	510-123	510-124
Catalog				Page No. - 3	Page No. - 3	Page No. - 3	Page No. - 3


*** W – Warranty , C – Certificate , D- Discount

Terms & Conditions –

- Goods offered - Subject to Prior Sale
- Price Validity: "15 Days from Date of Quotation"
- C.S.T 2% extra against form C. Otherwise 5% without form C For Out of Gujarat Sales only.
- VAT 5% extra for Sales within Gujarat. Prices Ex-Godown Ahmedabad.
- Payment against Proforma Invoice, Packing, Forwarding & Freight extra.
- **Bank Detail** – Kotak Mahindra Bank Ltd.
- **Branch** – Shivranjini
- **Bank IFSC Code** - KKBK 0000 810
- **Bank Account No.** 08102 00000 2689
- Note - While making payment online do mention your Company's name.
- TIN NO 24070901229 , CST No. 24570901229
- We are looking forward to your valued orders.

INSIZE MAKE

INDICATING MICROMETER

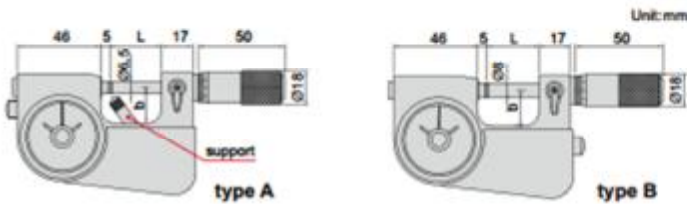

- Micrometer head graduation: 0.002mm
- Dial indicator: range ± 0.04 mm, graduation 0.001mm, accuracy 0.001mm
- Carbide measuring faces
- Supplied with setting standards (except 0-25mm)

Code	Micrometer head range	Micrometer head accuracy	Type	L	b	Remark
3332-25	0-25mm	4 μ m	A	28.5	19	with support
3332-50	25-50mm	4 μ m	A	53.5	30	with support
3332-75	50-75mm	5 μ m	A	78.5	45	without support
3332-100	75-100mm	5 μ m	A	103.5	57	without support
3332-25B	0-25mm	4 μ m	B	28.5	19	without support



3332-25



3332-25B

ATTENTION: NOT SUITABLE
FOR 0.001MM INDICATORS


MICROMETER WITH DIAL INDICATING

- Micrometer head graduation 0.01mm
- Anvil retracting range: 8mm
- Carbide measuring faces
- Supplied with setting standards (except 0-25mm)
- Optional accessory: dial indicators (graduation 0.01mm), digital indicators (resolution 0.01mm/0.0005")



3331-25A

Code	Micrometer head range	Micrometer head accuracy	(mm)	
			L	b
3331-25A	0-25mm	4 μ m	67	38
3331-50A	25-50mm	4 μ m	92.4	50
3331-75A	50-75mm	5 μ m	117.6	62
3331-100A	75-100mm	5 μ m	143	70
3331-125A	100-125mm	6 μ m	168.2	82
3331-150A	125-150mm	6 μ m	192	94.5
3331-175A	150-175mm	7 μ m	217	107

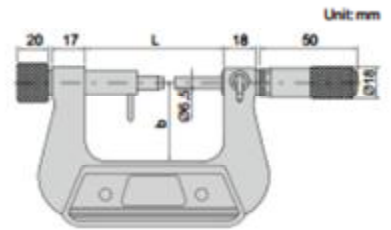

MITUTOYO MAKE

Indicating Micrometers

SERIES 510



FEATURES

- Retractable anvil with indicator for three-wire measurements of pitch diameter of precision screws, roundness and parallelism measurements.
- Spindle diameter: 8mm (.315")
- Carbide-tipped measuring faces.
- Measuring force: 5 - 15N (500 - 1500gf)
- Provided with a standard except for 25mm (1") model.
- IP protection level: 54

SPECIFICATIONS

Metric

Range	Order No.	Graduation of indicator	Indicating range
0 - 25mm	510-121	0.001mm	±0.060mm
25 - 50mm	510-122	0.001mm	±0.060mm
50 - 75mm	510-123	0.001mm	±0.060mm
75 - 100mm	510-124	0.001mm	±0.060mm

Inch

Range	Order No.	Graduation of indicator	Indicating range
0 - 1"	510-131	.00005"	±.0023"
1" - 2"	510-132	.00005"	±.0023"
2" - 3"	510-133	.00005"	±.0023"
3" - 4"	510-134	.00005"	±.0023"


Accuracy

- Micrometer: 3μm (.00015")
- Indicator: 1μm (.00005")

Measuring faces

- Flatness: 0.3μm (.000015")
- Parallelism:
 - 0.6μm (.00003") for models up to 50mm (2")
 - 1μm (.00005") for models over 50mm (2")

Dimensions

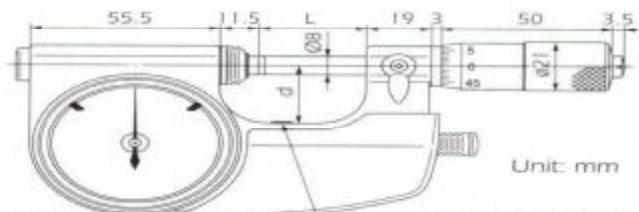

Range	L	d
0 - 25mm	31.5	25
25 - 50mm	56.5	38
50 - 75mm	81.5	50
75 - 100mm	106.5	63