



BEARING & TOOL CENTRE



Head Office

1st Floor, Vyapar Bhavan, Kadia Kui,
Relief Road, Ahmedabad - 380001.
Ph:- 079 - 22160386, 65254835, 22134835
Mobile : 7819819941, 9375706649

Ahmedabad Branch

GF-B-14, Jayraj Complex, Nr. Soni ni Chawl,
Odhav, Ahmedabad - 382415.
Ph:- 079 - 22890202, 65458950, 65404657, 65400202
Mobile : 7878825197, 7819819938, 9375706648

Website : www.bearingtoolcentre.com, www.bearingtoolscentre.com | Email : info@bearingtoolcentre.com

Our Sister Concern : RELIEF SERVICE CENTRE

Repairs, Removal of Jaw Error, Bore Gauge Extension, Instrument Modifications & Spares

Quotation

185 Polyethylene Siphon Pumps - Groz

Item Code	SPH / 1	SPH / 2	SPH / 3
Range	5 – 20 Ltr ,Discharge :6.5 LPM	210Ltr ,Discharge :17.5 LPM	210 Ltr ,Discharge :21 LPM
D %	22%	22%	22%
Price Rs	183	717	1103
Catalog	Page No. – 2,3,	Page No. – 2,3	Page No. – 2,3

Terms & Conditions –

- Goods offered - Subject to Prior Sale
- Price Validity: "15 Days from Date of Quotation"
- C.S.T 2% extra against form C. Otherwise 5% without form C For Out of Gujarat Sales only.
- VAT 5% extra for Sales within Gujarat. Prices Ex-Godown Ahmedabad.
- Payment against Proforma Invoice, Packing, Forwarding & Freight extra.
- **Bank Detail** – Kotak Mahindra Bank Ltd.
- **Branch** – Shivranjini
- **Bank IFSC Code** - KKBK 0000 810
- **Bank Account No.** 08102 00000 2689
- Note - While making payment online do mention your Company's name.
- TIN NO 24070901229 , CST No. 24570901229

GROZ MAKE


Product Brief

Pumps media from higher to lower level by Siphon Action

Vent Cap can be opened to stop siphon action

For use with media at temperature under 60°C

Pumps Water Based Fluids, Waxes, Detergents, Soaps & other light weight media

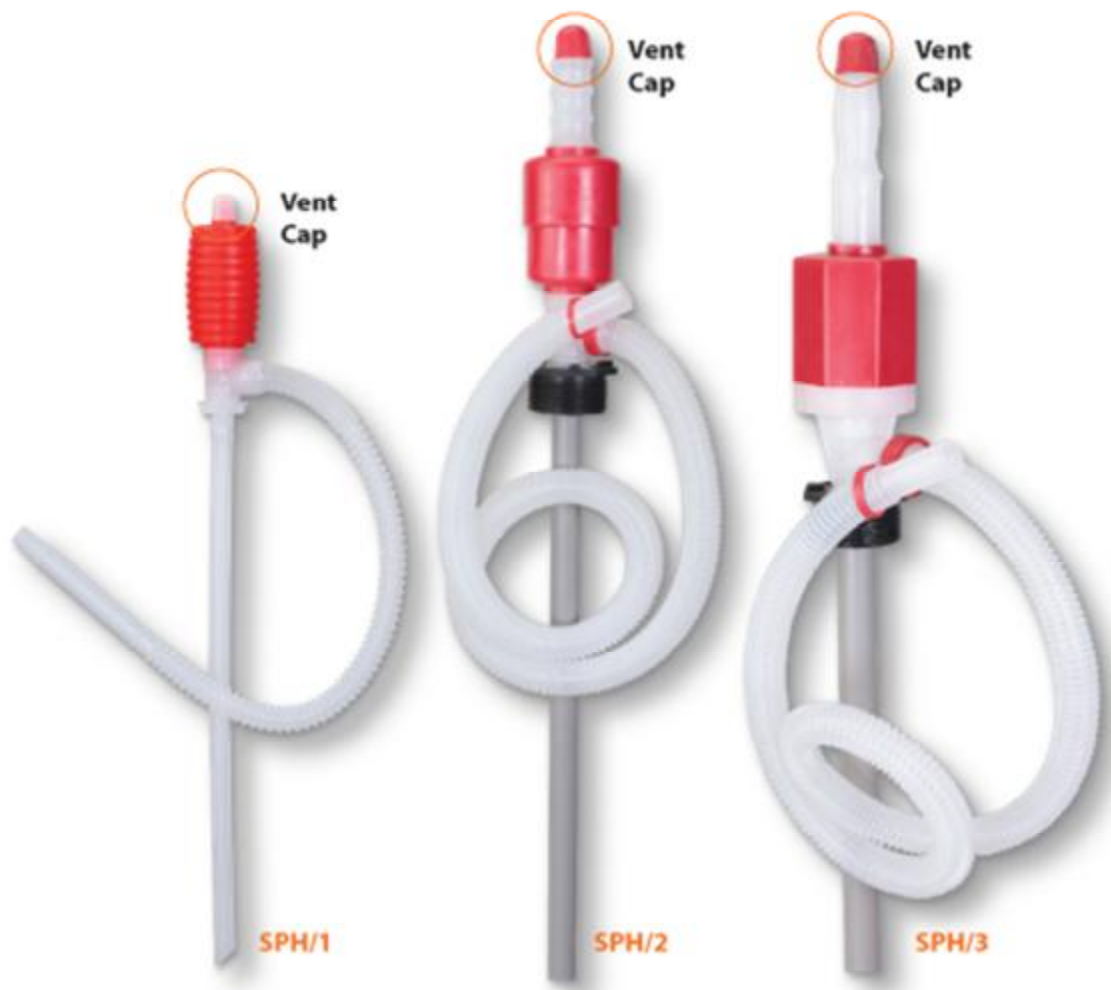




INSTRUCTIONS FOR USE SIPHON PUMPS



Congratulations on your purchase of this world class premium construction Pump

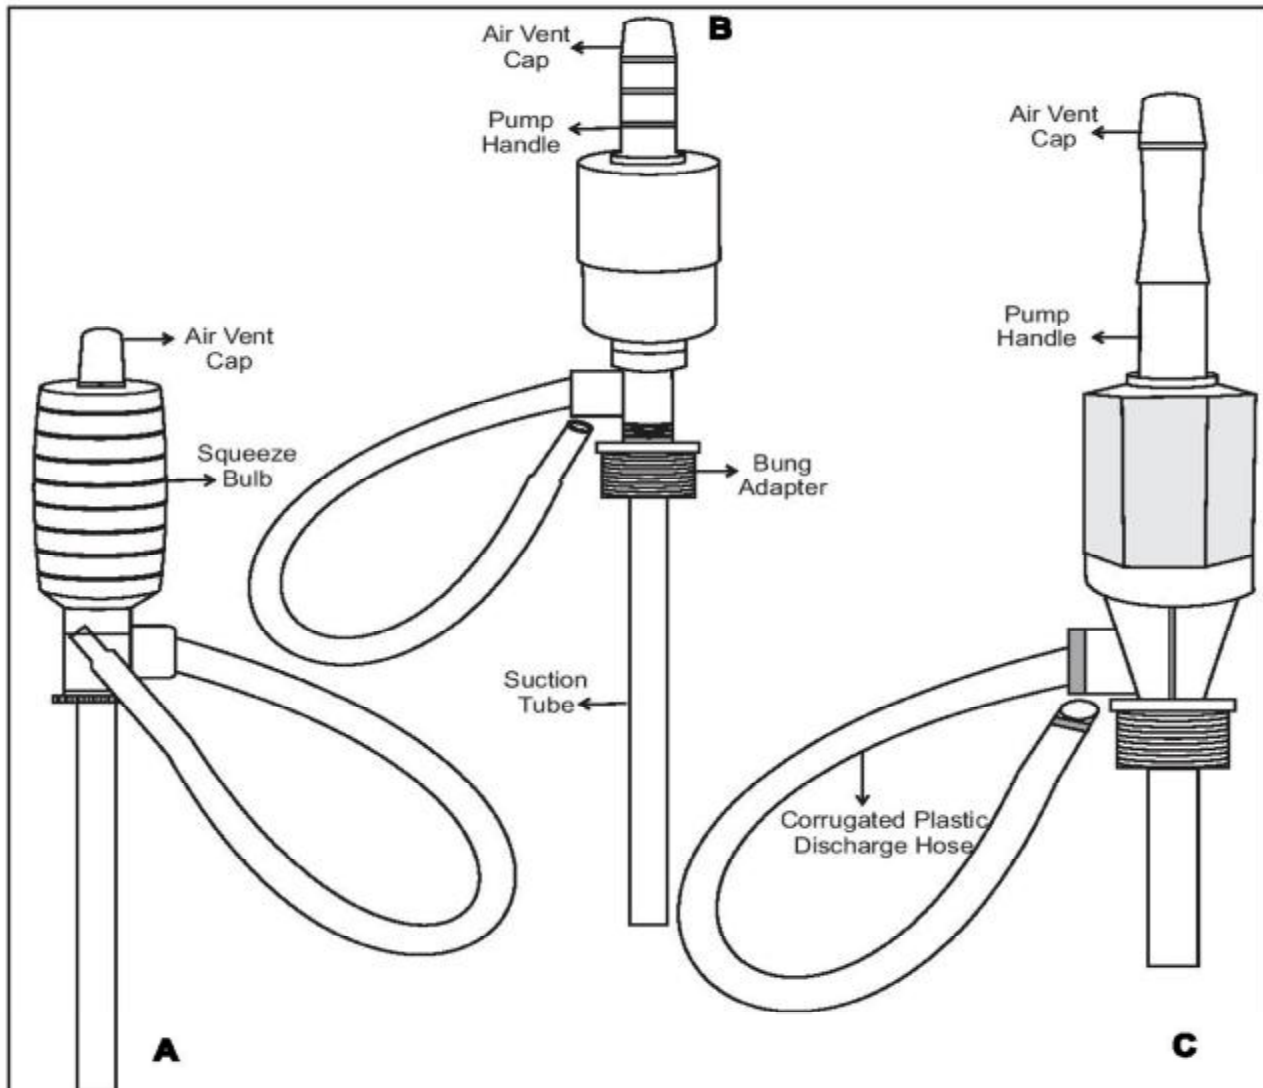

The pump comes in different configurations. Most popular forms are detailed below:

Type	Mechanism	Fits	Discharge	Wetted Components	Bung Type
A	Squeeze Bulb	1 gal. (5 litre) - 5 gal. (20 litre) pails	6.5 LPM (2 GPM)	Polyethylene	1-1/2" for use with pails
B	Up & Down Handle	15 gal. (50 litre) - 55 gal. (205 litre) drums	17.5 LPM (5 GPM)	Polyethylene & Polypropylene	Standard 2" for use with Drums
C	Up & Down Handle	15 gal. (50 litre) - 55 gal. (205 litre) drums	21 LPM (7 GPM)	Polyethylene & PVC	Standard 2" for use with Drums

Features

1. Easy to use Polyethylene (PE) Siphon Style pumps used to transfer light oils & water based media
2. Pump operates on Siphon action & is great for transferring media as long as level of media in the drum on which the pump is mounted is higher than the level of media of the container into which it is being transferred
3. Supplied complete with corrugated plastic discharge hose

Recommended Use

Water-based fluids, detergents, waxes, soaps, antifreeze, some mild acids, and other liquids compatible with pump materials of construction.

Pump should only be used with light weight & non Inflammable liquids

Do not use with

Any media not compatible with materials used in the pump construction.

These pumps must never be used with concentrated acids, Acetone, Benzene, Creosol, Ethyl, Phenol, Nitric Acid, Hydrochloric Acid, Sulphuric Acid etc.

Pumps are not designed to be used with Hot Liquids at temperatures above 60° C (140° F)

Assembly

Pump does not require any assembly. However, if necessary, cut suction tube at an angle to fit your supply container

Pump Operation

1. Insert the Suction tube into the opening on the drum from which media is to be pumped & screw down the Bung Adapter (Type B & C)
2. Position the discharge hose into the receiving container. For Siphoning/ Automatic transfer, be sure that the level of media in the supply container is higher than that of the receiving container
3. Make sure that the Air Vent cap is in the fully closed position
4. Grasp pump handle & pump up & down (Type B & C) or Squeeze Bulb (Type A) repeatedly. When discharge hose is completely full, you may cease pumping /squeezing to allow siphoning action
5. Pump will continue to dispense media & will slow the discharge action once the level in the supply container lowers & that in the receiving container rises. Once the level equals, Siphon action will stop
6. Pumping can still be continued by repeated up & down movement of the handle (Type B & C) / Squeezing of the Bulb (Type A)
7. To stop Siphon flow at any time, unscrew Air Vent Cap. To restart siphoning action, once again screw the air vent cap & follow step 4 above

S1400, Rev A