



BEARING & TOOL CENTRE



Head Office

1st Floor, Vyapar Bhavan, Kadia Kui,
Relief Road, Ahmedabad - 380001.
Ph:- 079 - 22160386, 65254835, 22134835
Mobile : 7819819941, 9375706649

Ahmedabad Branch

GF-B-14, Jayraj Complex, Nr. Soni ni Chawl,
Odhav, Ahmedabad - 382415.
Ph:- 079 - 22890202, 65458950, 65404657, 65400202
Mobile : 7878825197, 7819819938, 9375706648

Website : www.bearingtoolcentre.com, www.bearingtoolscentre.com | Email : info@bearingtoolcentre.com

Our Sister Concern : RELIEF SERVICE CENTRE

Repairs, Removal of Jaw Error, Bore Gauge Extension, Instrument Modifications & Spares

Quotation

142 Push Pull Gauge – Yuyustu Make

Range - gms	300	500	1000	2000	3000
Least count	2.5	5	10	20	25
Width * height	24*220	24*220	24*220	24*220	24*220
Rs.	7400	7400	7400	7400	7400
Model	PPM300	PPM500	PPM1000	PPM2000	PPM3000
Catalog	Page - 2	Page - 2	Page - 2	Page - 2	Page - 2
NABL Calibration Rs.	3000	3000	3000	3000	3000
Non - NABL Calibration Rs	2200	2200	2200	2200	2200

Range – gms	5000	10000	20000	30000	50000	190 & 20	280 & 30
Least count	50	100	200	250	500	50	100
Width * height	24*230	30*230	30*230	30*230	30*230	30*230	30*230
Rs.	7400	9750	9750	9750	9750	9750	9750
Model	PPM5000	PPM10	PPM20	PPM30	PPM50	PPM190	PPM280
Catalog	Page - 2	Page - 2	Page - 2	Page - 2	Page - 2		
NABL Calibration Rs.	3000	3000	3000	3000	3000	3000	3000
Non- NABL Calibration Rs	2200	2200	2200	2200	2200	2200	2200


Pushpull Meter Accessories Stand with Holder-slide STN Rs. 9500 + 1600(P&F)
Holder HDR Rs. 300 + 100 (P&F)
Holder-slide HDSL Rs. 5000+ 400 (P&F)

Terms & Conditions –

- Goods offered - Subject to Prior Sale
- Price Validity: "15 Days from Date of Quotation"
- C.S.T 2% extra against form C. Otherwise 5% without form C For Out of Gujarat Sales only.
- VAT 5% extra for Sales within Gujarat. Prices Ex-Godown Ahmedabad.
- Payment against Proforma Invoice, Packing, Forwarding & Freight extra.
- **Bank Detail** – Kotak Mahindra Bank Ltd.
- **Branch** – Shivranjini
- **Bank IFSC Code** - KKBK 0000 810
- **Bank Account No.** 08102 00000 2689
- Note - While making payment online do mention your Company's name.
- TIN NO 24070901229 , CST No. 24570901229
- We are looking forward to your valued orders.

YUYUSTSU MAKE

Pushpull Meter is a force measuring instrument for both Push and Pull. There is ZERO ADJUST. An additional red pointer retains the maximum reading encountered.

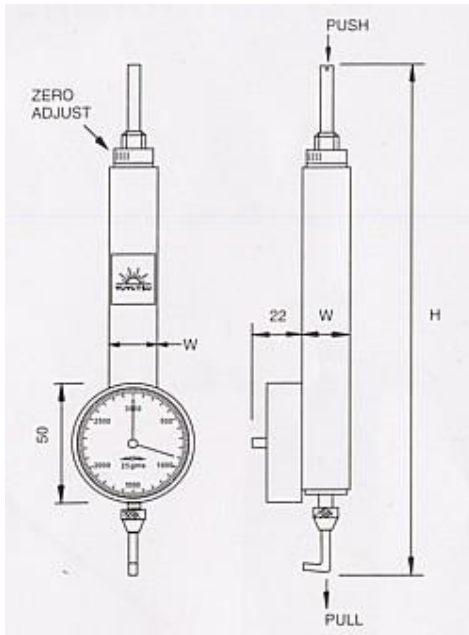

Accuracy : ± 1 division

Range gms	Least Count gms	W mm	H mm	Weight gms
300	2.5	24	220	300
500	5	24	220	300
1000	10	24	220	300
2000	20	24	220	300
3000	25	24	220	300
5000	50	24	230	400
10000	100	30	230	400
20000	200	30	230	400
30000	250	30	230	400
50000	500	30	230	400

Law of weights & measures not applicable.
Weights & Dimensions are nominal.

Pushpull Meter is a force measuring instrument for both push and pull.

RED POINTER retains the maximum reading encountered. By rotating it anti-clockwise set it to zero again.

Because of gravity the METER when held inclined (or upside down) shows reading different then when held vertically. To nullify gravity effect, turn

ZERO ADJUST holding the METER the same way as will be held while measuring.


Spot calibration gives better results. Apply standard force (the one nearest to the force to be measured), and with the ZERO ADJUST make the instrument read the value of the standard force.

METERS with capacities below 2 kg. may require a light tap to overcome static friction.

To prevent damages to inside parts, hold the pushing/pulling ROD firmly while changing accessories at its ends.

Do not push the PULL END or pull the PUSH END. It has overload capacity of 30%. METER can be clamped on SQUARE BODY.

Warranty of one year (invalid if tampered with).

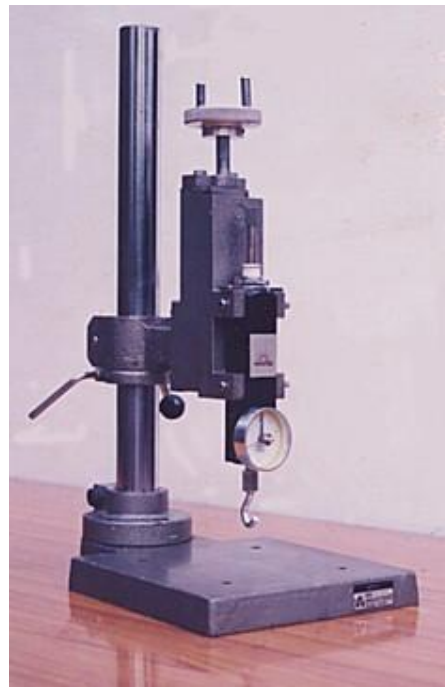

Accessories : Stand with Holder - Slide.

Base : 200 x 200 mm
Column Height : 400 mm
Slide Travel : 100 mm
Weight : 13 kg.